


Step-by-Step Instructions

(PRINT this set of instructions to follow every time you refill your cartridge)

CANON BC-05
APPLE M4609G/A

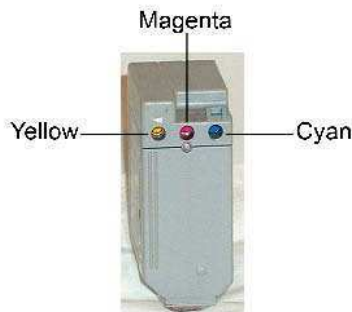

Items Needed: gloves, cardboard station #2, hand-drill, cyan, magenta & yellow ink, aluminum tape , paper towels, review hints & tips and check list

Syringe: Attach needle tip (located inside station # 4) to the syringe tightly. Unscrew lid on ink bottle. Puncture silver seal with needle tip making a small hole in the center of seal. Using the correct color pull the correct amount of ink into the syringe. Rinse syringe and needle tip after every use and before using syringe with another color. Rinse syringe and needle tip with water until the water runs clear.

- 1.) Place cartridge on it's side in cardboard station #2 with the three vent holes facing up as shown in photograph. Tape the exit port hole.
- 2.) Using the hand-drill provided, press the drill into each of the three plugs turning clockwise until the drill is imbedded in the plug. Once this is secure, simply lift the plug out of the hole. These are your fill-holes. Each hole is a separate color chamber. See photo for color sequence.
- 3.) When refilling one chamber, always tape over the remaining two fill-holes in order to prevent color contamination.
- 4.) Take color bottle of ink, pull the ink into the syringe and insert syringe tip in fill-hole and slowly insert up to 6 ml of the correct color of ink into the ink fill-hole. Gently push the syringe to inject ink into the cartridge. Since cartridge is sponge-filled, it is necessary to refill this cartridge slowly in order that the ink can sufficiently saturate the internal sponge. If ink begins to "bubble" out of the fill-hole, remove bottle tip. Bubbling occurs when a cartridge is either overfilled or if ink is being inserted too quickly. Wait several minutes and then try to slowly insert more ink. If ink begins to bubble out of the fill-hole, or leak from the printhead, you have plenty of ink in the cartridge.

5.) Please note that colored ink is not equally used and each chamber may not require the same amount of ink.

6) After refilling, remove tape. Blot off any excess ink that maybe around fill-hole area. Do not re-plug the fill holes. After refilling, remove cartridge from refill station. Without the cartridge "printhead" touching the paper towels, place refilled cartridge upright upon folded paper towels and tilt cartridge at a slight angle. If the printhead on the cartridge is touching the paper towel, it could create a wicking effect that would pull the ink from your refilled cartridge. It is necessary for the cartridge to sit for at least 20 minutes after refilling because there may be some minor leakage from the cartridge. Never put a leaking cartridge back into your printer.

7.) Check the ink flow by gently pressing a dry paper towel against the printhead. You should see three dots of magenta, cyan and yellow. If you do not see these three colors, gently press a warm, wet paper towel against the printhead until all three colors are visible.

8.) When all three colors are visible on the paper towel, make sure cartridge is not leaking, then place cartridge back into the printer and run a print test. Or Print 3 pages using:

http://www.refills4you.com/support/black_print_test.html Black ink test
http://www.refills4you.com/support/color_print_test.html Color ink Test

AccuBrite, Inc. is not affiliated with the listed printer manufacturers or their subsidiaries. The use by AccuBrite, Inc. does not imply endorsement by or association with the brand name owners. The listed manufacturers, printers and cartridges are used only for the purpose of showing the compatibility of this AccuBrite, Inc. product. All other trademarks, brand names and logos referenced in or on this product are the property of their respective owners. This material is protected by the copyright laws of the United States and other countries. It is illegal to reproduce these instructions. It may not be reproduced, distributed, or altered in any fashion by any entity (either internal or external to AccuBrite), except in accordance with applicable agreements or contracts of licensing, without the express written consent of AccuBrite, Inc.

Copyright © AccuBrite, Inc. 2003-2008. All rights reserved